


How to put fabric
seat on a deckchair

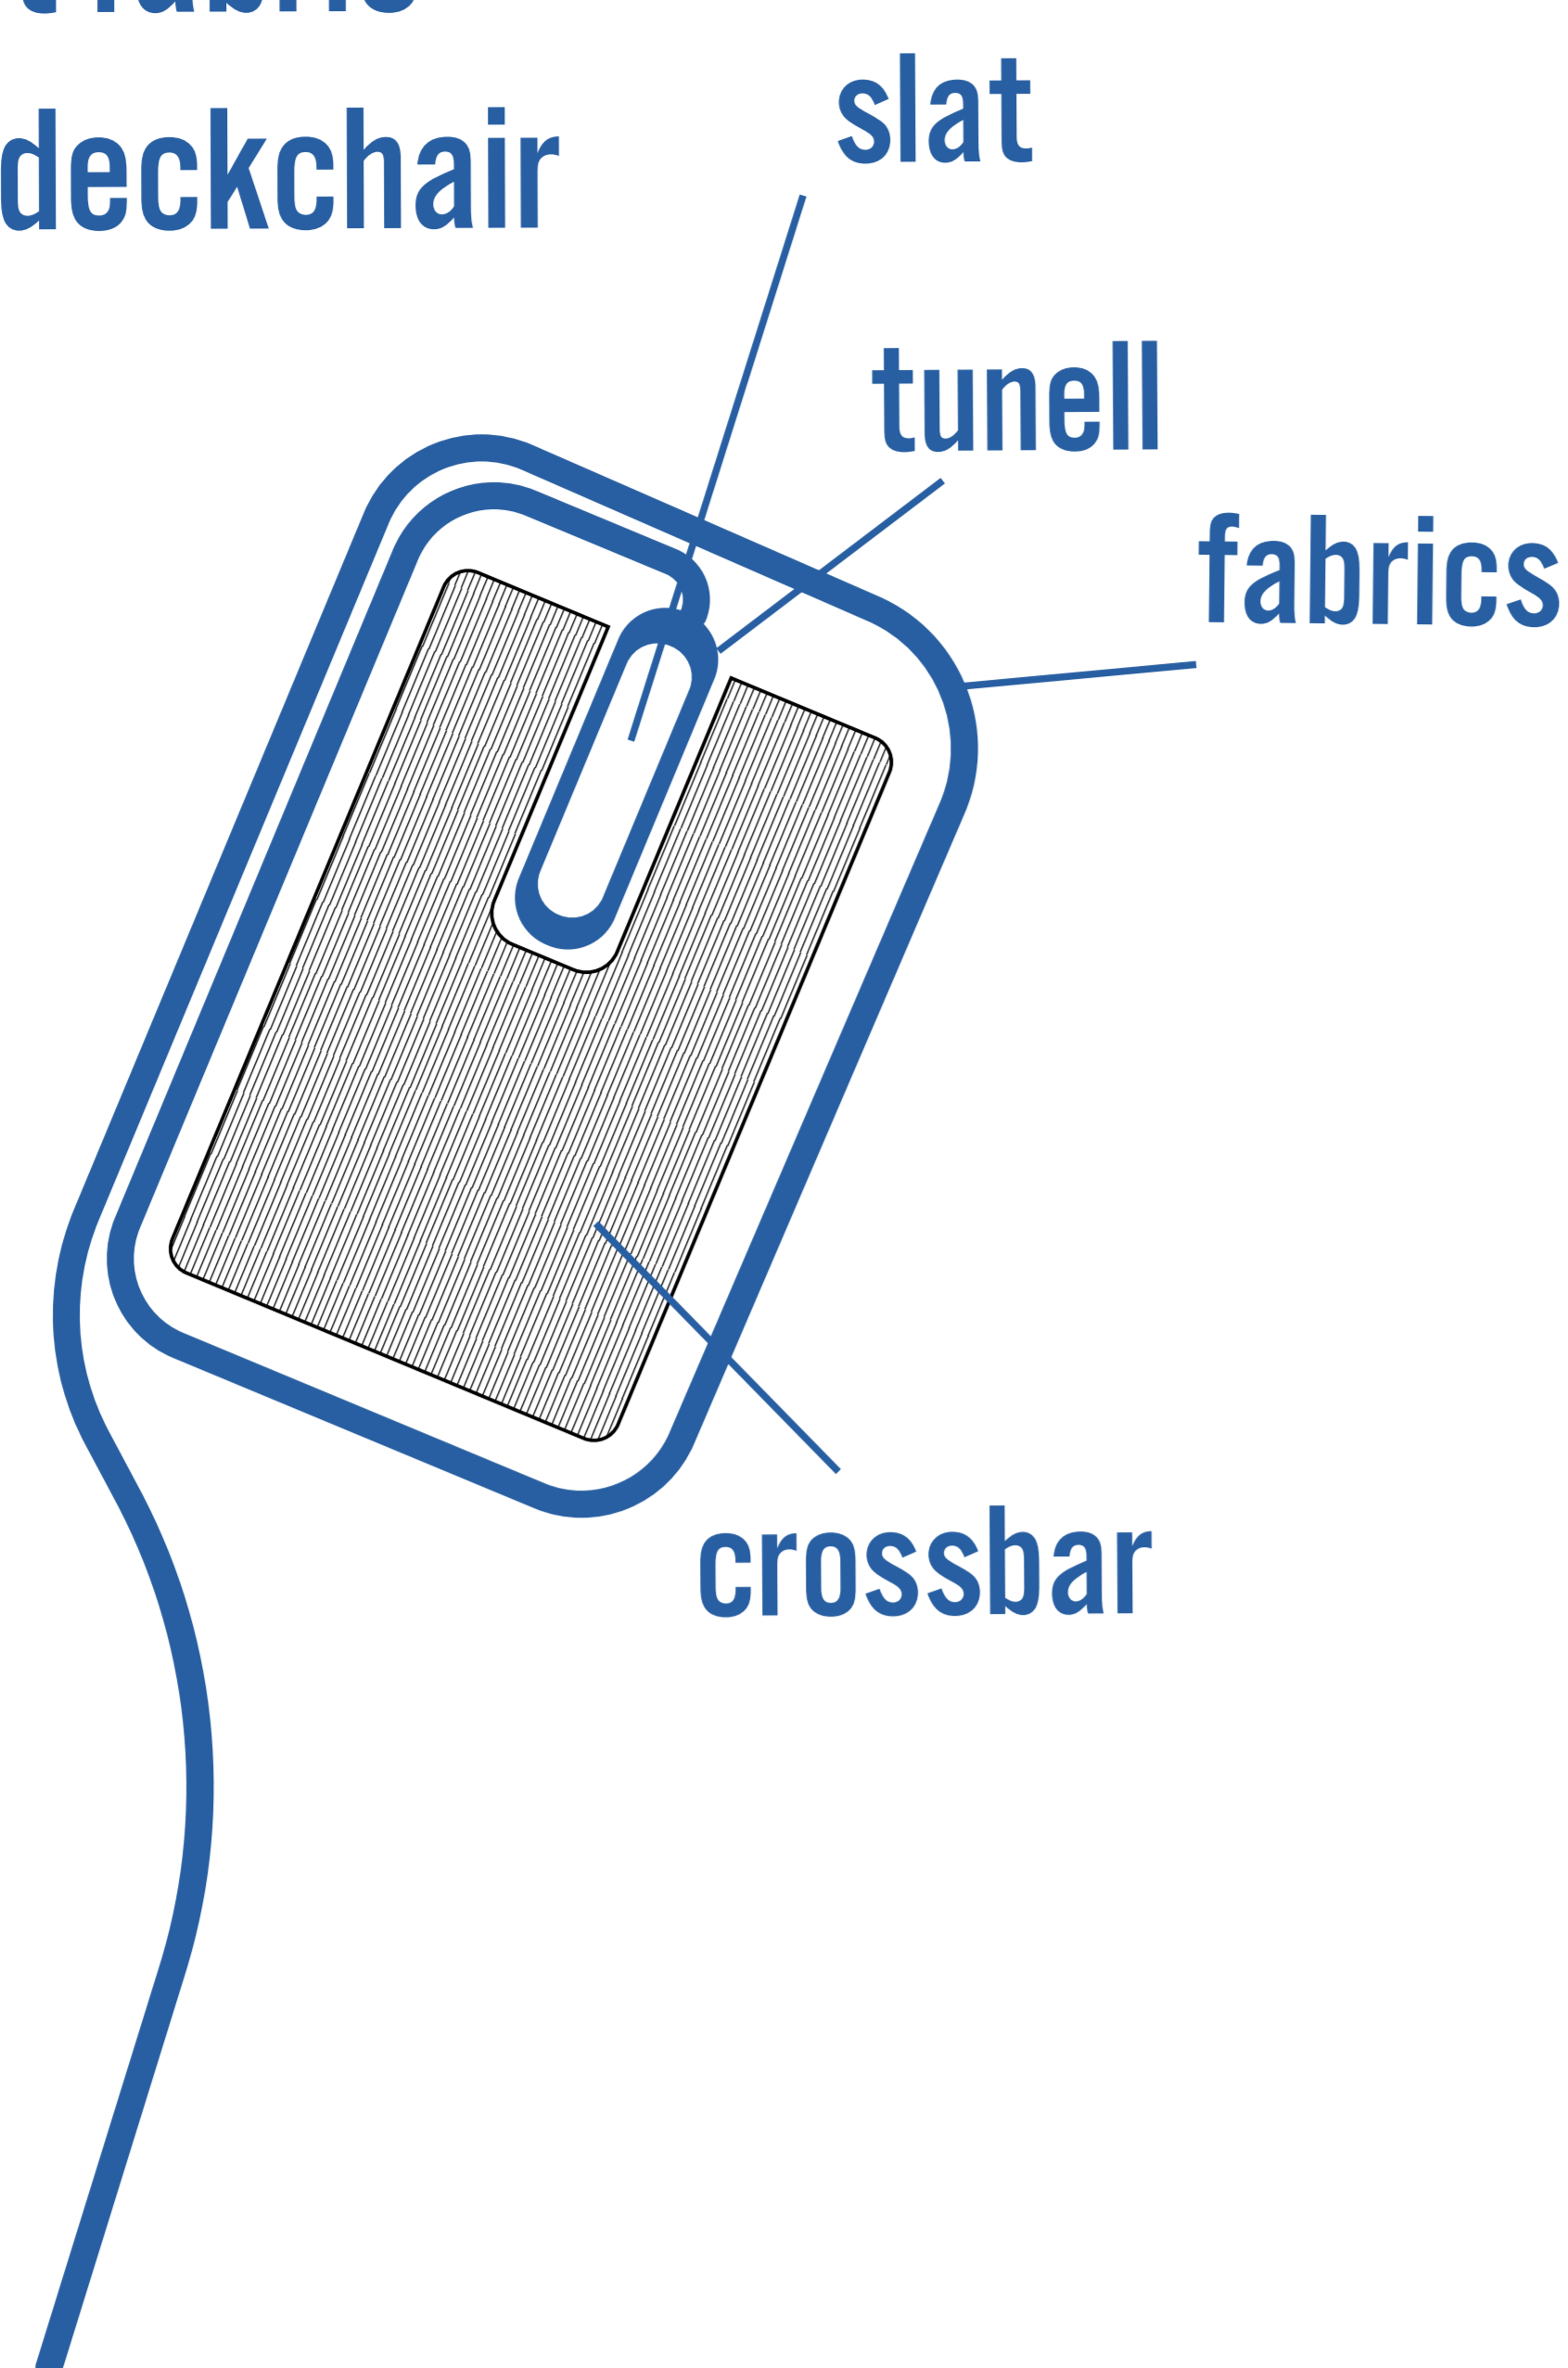

Seat assembly instructions

deckchair L-01-W_v2

- 1 2 Take the top of the seat and put in pocket the first (out of two) piece of thin plywood, attached to deckchair.
- 3 Place the top of the printed seat, together with plywood, underneath the upper crossbar of deckchair, print upwards. (see photo no. 3)
- 4 Insert the printed fabric into the groove in the upper crossbar, together with the wooden plywood. (photo no. 4)
- 5 Fold the whole seat outwards over its top crossbar to block the placed plywood against falling out. (Photo 5)
- 6 Like at he beginning, insert the second thin plywood, attached to deckchair. (photo No. 6)
- 7 Grab the lower edge of the seat, including plywood, and pull the fabric over the lower crossbar of the dechchair frame until it is possible to place the wooden slat in the groove. (photo 7)
- 8 Place the wooden slat in the groove of the crossbar pressing it carefully on its whole length (photo no. 8).

Finally, apply moderate pressure to the fabric at its centre point so that the seat presses down on the slats in the grooves and block them against falling out.


Attention!

After installing the seat, deckchair is designed for use by one person. Maximum load = 120 kg

Watch the video



Seat assembly instructions

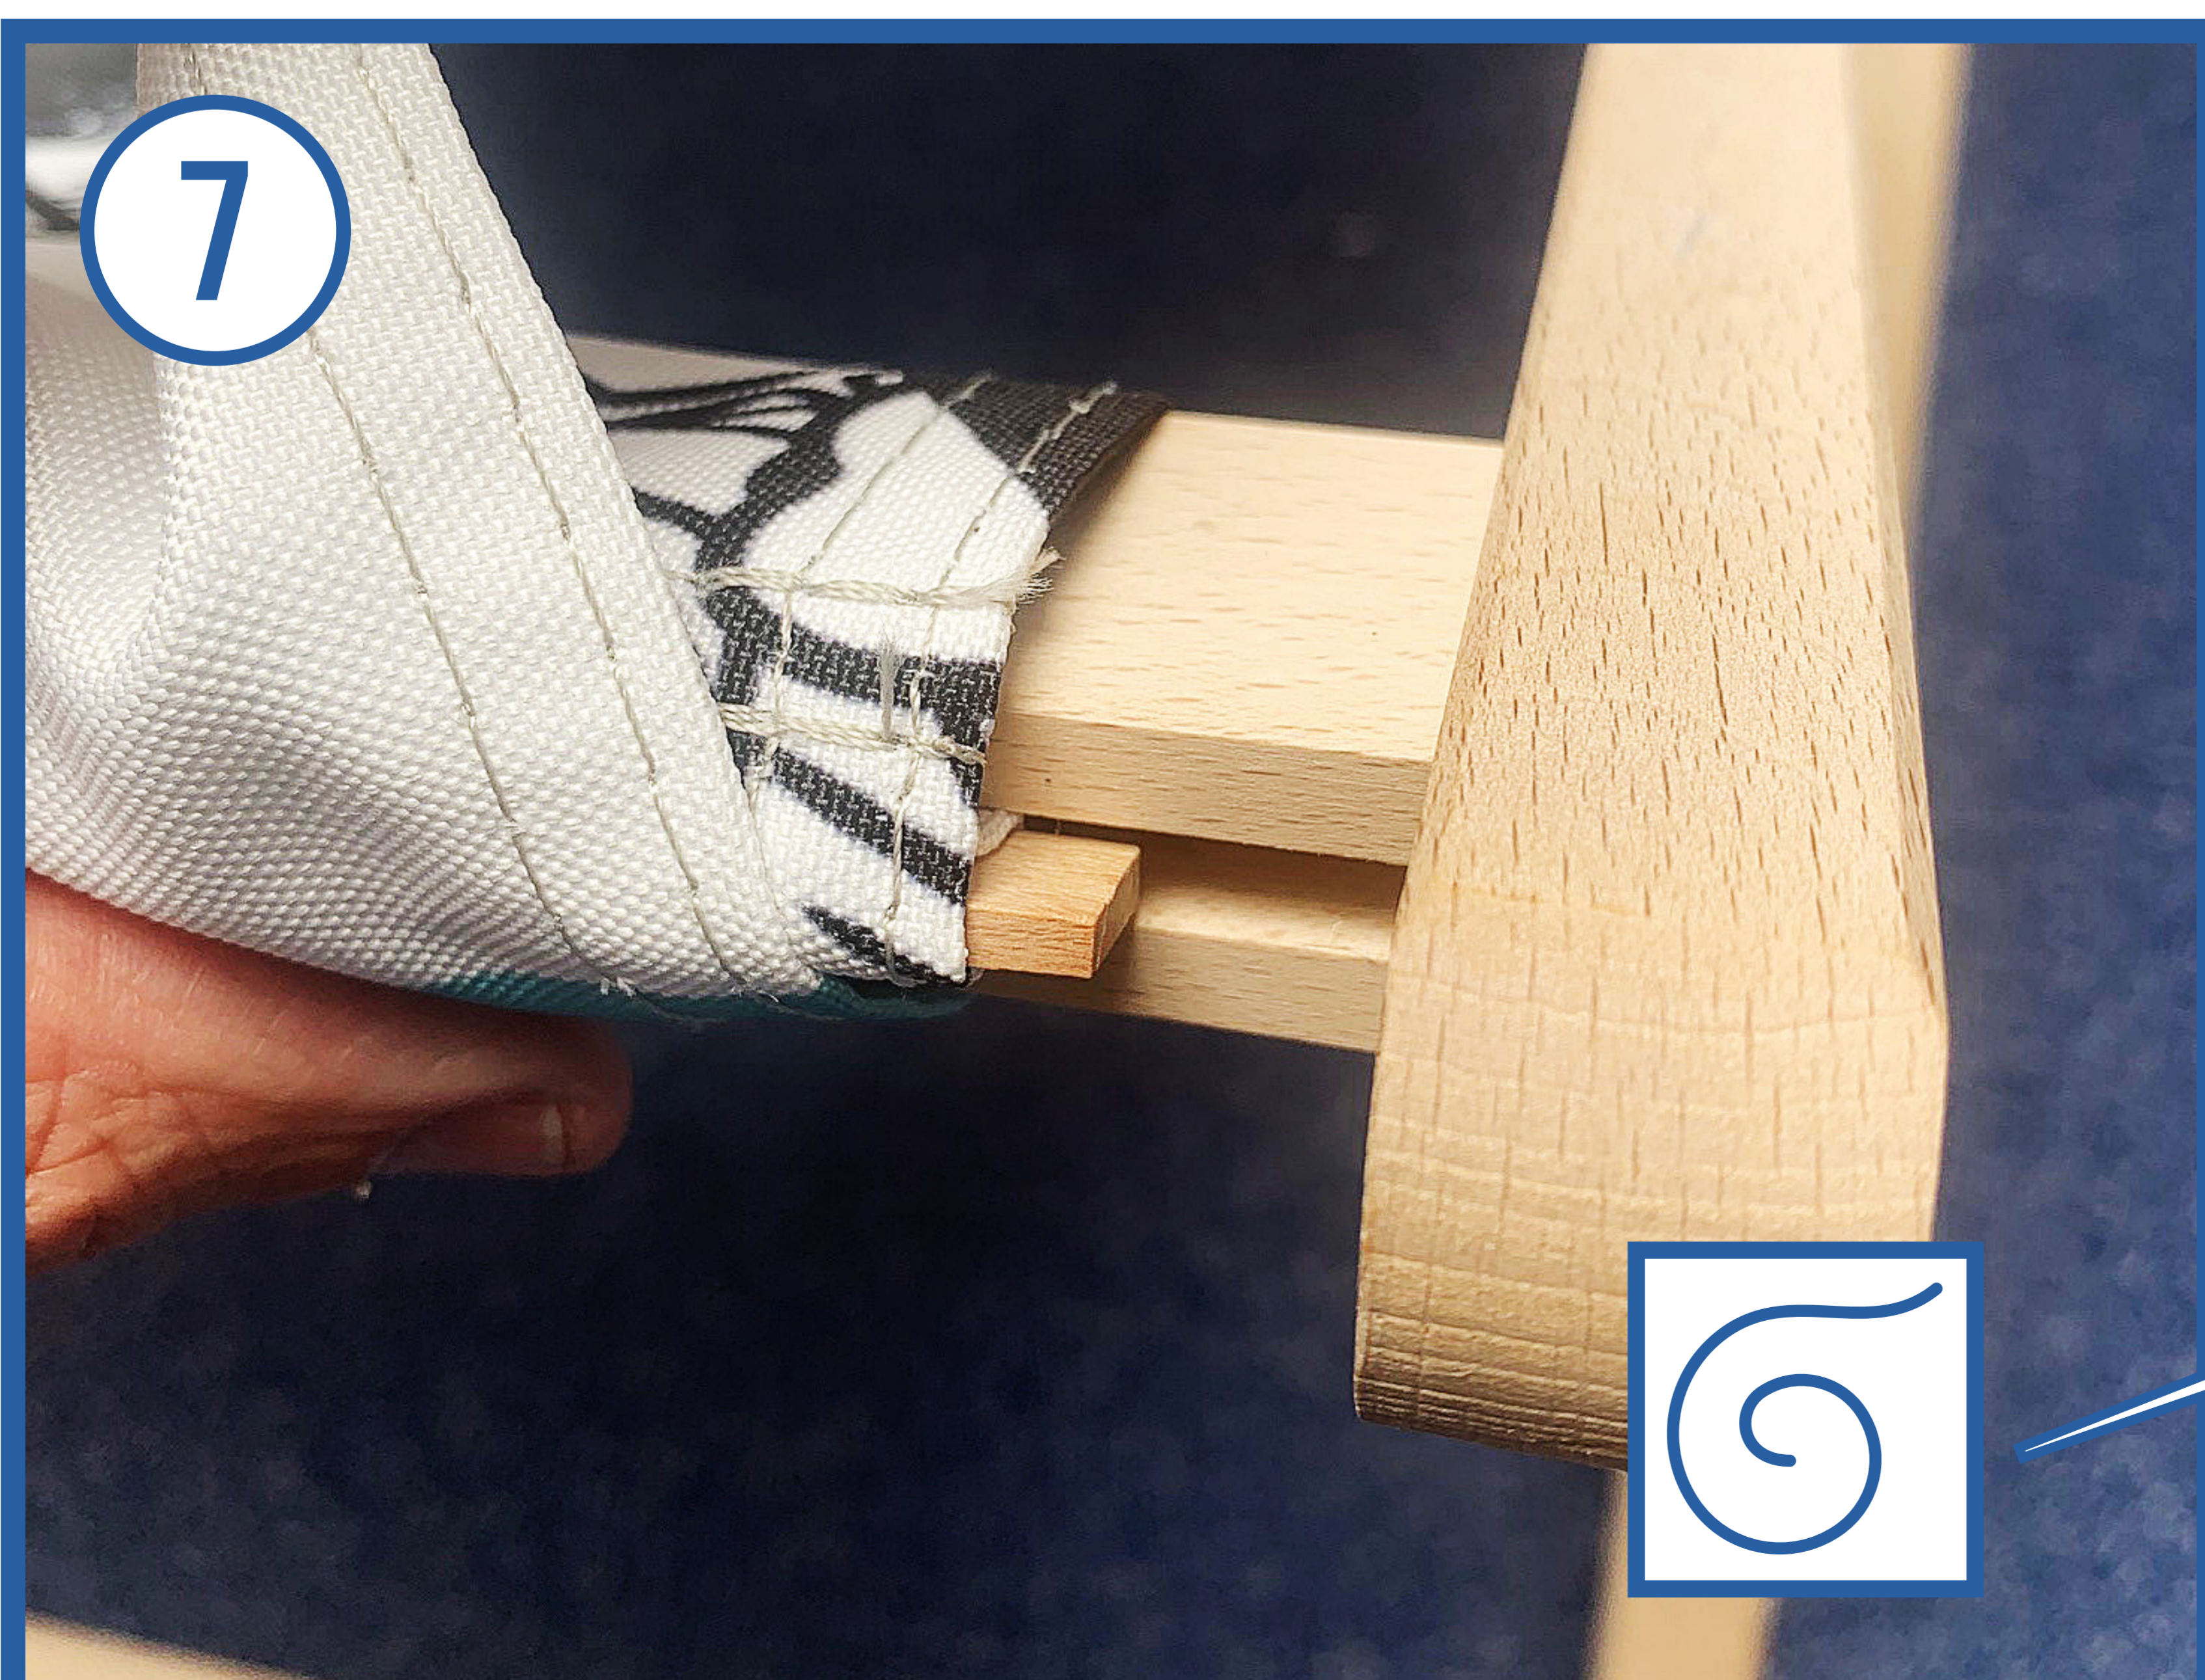

Watch the video

